


Swing gate

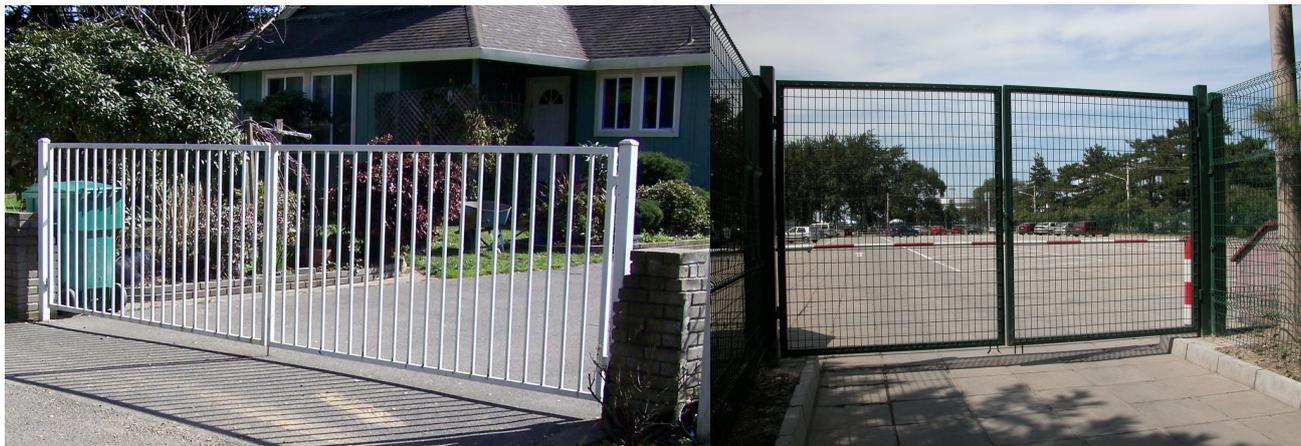

Description

Swing gate perfectly combine with around fencing , showing excellent integrity.

Opening as 180 degree, for coming and going is very smoothly.

Gate post making as quadrate post or circular tube, attached heavy duty hinge,Stainless safety lock system. And high strength welded wire panel composed with frame; Dia 3.0---8.0mm, Mesh size designed as 50*50mm,50*100mm,50*200mm; Also the panel can design double wire welded 6/6/6mm, 8/6/8mm. After high quality powder coating , there have a strong erosion resistance and anti-ultraviolet ;The installation is very easy and convenience

Swing gate features

- ❖ Width from 2000---6000mm all available .
- ❖ Height from 1500-----2100mm,
- ❖ Wire diameter of panel which welded on frame:from 4.0 -----to 8.0mm
- ❖ Pre galvanized wire welded panel , Pre galvanized tube welded frame.
- ❖ Powder sprayed coating after fabricated.
- ❖ Any Ral colour available for client choose.

Swing gate application

It is very popular used in Garden,Villa, School,Commercial premises and sports area.

Company:Anping County Hangtong Wire Mesh Co.,Ltd.

Address:East of Baoheng Road,South of Anping County,Hebei P.R China.

Website:<http://www.hangtongfence.com> Email: info@hangtongfence.com TEL: 86-318-751633 FAX: 86-318-7529613



Specifications

Gate height(mm)	Fence width(m)	Wire Diameter (mm)	Mesh size (mm)	Square Post Section(mm)	Circular Post(mm)	Post Height (mm)
1500	2000	4.0	50×50	80×80 ×2.0	60×2.0	1600
1600	3000	4.0	50×100	80×80 ×3.0	60×2.0	1900
1800	4000	5.0	50×200	80×80 ×3.0	75×2.0	2200
2000	5000	5.0--8.0	50×100	80×80 ×3.0	80×2.0	2600
2100	6000	5.0--8.0	50×200	100×100 ×3.0	100×3.0	3000
2400	6000	5.0---8.0	50×200	100×100 ×4.0	100×3.0	3600

Gate height(mm)	Fence width(m)	Vertical tube (mm)	Tube distance (mm)	Square Post Section(mm)	Circular Post(mm)	Post Height (mm)
1500	2000	20×20×1.5	125×125	80×80 ×2.0	60×2.0	1600
1600	3000	20×20×1.5	125×125	80×80 ×3.0	60×2.0	1900
1800	4000	25×25×1.5	125×125	80×80 ×3.0	75×2.0	2200
2000	5000	25×25×1.5	125×125	80×80 ×3.0	80×2.0	2600
2100	6000	25×25×1.5	125×125	100×100 ×3.0	100×3.0	3000
2400	6000	25×25×1.5	125×125	100×100 ×3.0	100×3.0	3600

Material

Mesh panel using high quality low carbon steel wire and welded by computer controlled machine. Post using international standard tube as material (60×60×2.0mm ,75×75×3.0mm,80×80×3.0mm,100×100×3.0mm or Dia 60×2.0mm,75×2.0mm,80×2.0mm, 89×3.0mm ,100×3.0mm), Frame adopted Pre galvanized tube welded(30×30×1.

5mm,40×40×1.5mm,40×60mm,60×60×1.5mm)

Fixings: Heavy duty hinges,Stainless Steel lock system.

Surface: Gate use pre hot dipped galvanized wire or tube fabricate and after several clear procedure. We use

Company:Anping County Hangtong Wire Mesh Co.,Ltd.

Address:East of Baoheng Road,South of Anping County,Hebei P.R China.

Website:<http://www.hangtongfence.com> Email: info@hangtongfence.com TEL: 86-318-751633 FAX: 86-318-7529613



Anping County Hangtong Wire Mesh Co.,LTD Best fence for global market.

famous international powder (AkzoNobel) sprayed.In that case can got strongly resist the corrosive and ultraviolet radiation. Double coating layer high quality anti corrupt . The longevity will 10 years long.

Hot dipped galvanized after fabricated ,The Zn can got 500----60g/m2. Longevity will got more than 15 years.

Trade Item

Delivery Terms:EXW , FCA,FAS,FOB,CFR, CIF,CPT,CIP

Payment Currency:USD, EUR, AUD,JPY, CAD, GBP, CNY

Payment Item:T/T, L/C, PayPal, Escrow

Nearest Port:Xingang port,Qingdao port

Delivery Time:General after 25days upon received T/T30% advance payment

Popular Payment : T/T 30% in advance deposit, the balance against received the copy of B/L.



HT-FENCE

Company:Anping County Hangtong Wire Mesh Co.,Ltd.

Address:East of Baoheng Road,South of Anping County,Hebei P.R China.

Website:<http://www.hangtongfence.com> Email: info@hangtongfence.com TEL: 86-318-751633 FAX: 86-318-7529613